

Din Live Line Indicator









NEPEAN Power is a proven leader in the supply and manufacture of quality engineered solutions, products and technologies. Established in 1994, through the commitment of our dedicated team we have become a supplier of choice.

Function and Feature


- Applicable to circuit with rated voltage 240V~ and frequency 50/60Hz for visual indication and warning.
- Three phase or single phase LED lamp in one module.
- Each phase indication by its own colour Red, White or Blue


Technical Specifications


Rate Voltage (Un)	24,48, 110, 240VAC
	24,48,110,240VDC
Rated Frequency	50/60Hz
Rated Isolating Voltage (Ui)	415V
Rated Impulse Withstand Voltage (Uimp)	4KV
Number of Poles	3P or 1P
Light Source	LED Diode
Light Source Capacity	0. 8W
Colours	Red, White and Blue
Terminals	Pillar Type
Cabel Termination	1.5~6mm'
Torque of Screw	1.2Nm
IP Degree	IP 20
Standards	IEC/EN 60947 - 5-1


Din Live Line Indicator

Dimensions



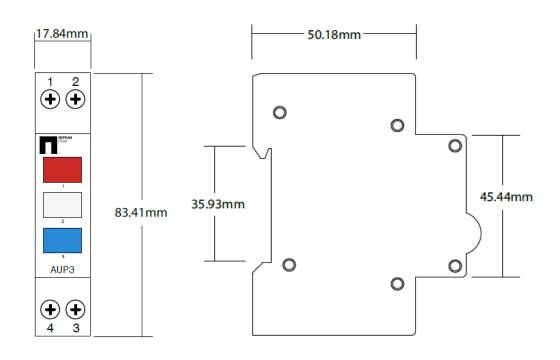





Ordering Information

Part Number	Description
AUP1-R-240*	Led Indicator,1P, 24V-240V,50Hz, LED=Red.
AUP3-RWB-415*	Led Indicator, 3P,110V-415V,50 Hz, LED=Red,White,Blue.

*Stocked Item